

Specification					
Style:	Contemporary				
Product Type:	Bathroom Tap				
Main Construction Material:	Brass				
Mount Type:	Deck Mounted				
Handle Type:	Lever				
Connection Inlet:	3/4" BSP				
Connection Outlet:	G 1/2"				
Number of Tap Holes:	2				
Valve/Cartridge Type:	1/4 Turn 3/4 Ceramic Disc Valves				
Plumbing System Requirements:	Ideally Balanced				
Working Pressure Range:	Min. 0.2 bar, Max. 5.0 bar				
Maximum Hot Water Temperature: °C	65				
Maximum Dynamic Pressure: (bar)	5				
Maximum Static Pressure: (bar)	10				
Flow Type:	Single				
Flow Rate: (I/min @ 3 bar)	27.2				
Isolation Included:	No				

Features:

- Brass construction
- Ceramic disc valve for smooth flow control
- Easy-to-use lever handles
- Single-function rub-clean antilimescale handset and wall bracket
- 1.5m shower hose

Product Certifications:




WRAS Certificate No: 1709701 WRAS Expiry Date: 30/09/2022



For more products, visit our website: http://www.bristan.com



Dimensions (measurements in mm)

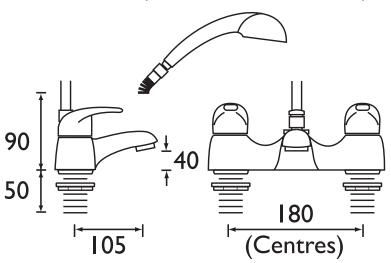

I 500mm Hose, Rub Clean Handset & Wall Bracket

Flow Rates (I/min)								
System Pressure (bar)	0.2	0.5	1	2	3	5		
Handset	3.4	6.3	11.7	18.9	27.2	38.3		
Bath Filler	17.6	33.6	41.3	58.9	68	77.3		

TECHNICAL DATA SHEET



