
POINTE

ALL WEATHER EPOXY JOINTING COMPOUND

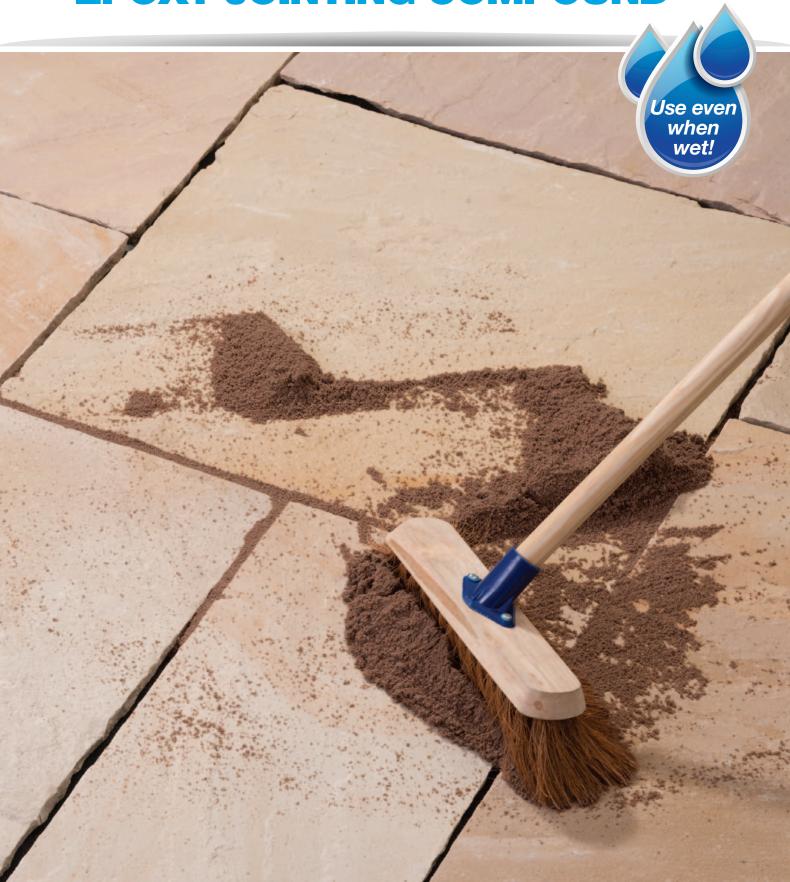

POINT TX

PERFECT POINTING FOR YOUR PATIO OR DRIVEWAY

Pavestone Pointfix is a superior two pack multi-use jointing and repair compound. One pack contains epoxy resin within the compound and the other epoxy hardener. Once thoroughly mixed the jointing compound cures to create a permanent hard jointing material.

There are no liquids or powders to measure and mix in, so mixing and applying Pavestone Pointfix is much cleaner and easier than traditional sand and cement mortar. Pavestone Pointfix is specifically designed for pointing and infilling between many types of surfaces including concrete paving, natural stone paving, brickwork and stonework.





- No specialist tools
- Fast application
- No waste only mix what you need
- Simple to use
- Cost effective
- Quick curing
- Can be applied to wet surfaces even when raining
- Prevents weed growth
- Pet friendly

PATIO OR DRIVEWAY



Professional pointing in 6 simple steps



Open both packs, measure 50/50 ratio of each & mix until uniform in colour.



With a soft brush/broom, push Pointfix mixture into the gaps.



Compact firmly into joints using a jointing tool. (see diagram)




Refill, if necessary, using a small soft hand brush.




Compact the surface to give it a clean flat finish.



Brush off any excess & wipe off any remaining residue with a damp sponge.



Fill the Pointfix to just below the surface of the paving, particulary if thetop edge is slightly rounded.













Available in 5 colours

Pointfix comes in five shades to perfectly complement any paving colour. The 50/50 mixing ratio means you only need to mix what is needed, cutting down on waste.

Pointfix is weather resistant, light resistant and chemical resistant. We try to keep our colours consistent but colours can vary between batches due to the natural sand used.

COVERAGE

| Paving Size/mm | Example 10mm Joint Width, 24mm deep |
|----------------|-------------------------------------|
| 600 x 600 | 7.5m ² |
| 600 x 450 | 6.3m ² |
| 450 x 450 | 5.4m ² |
| 300 x 450 | 4.5m ² |
| 300 x 300 | 3.6m ² |

All quoted coverages are approximates.

APPLICATION

Before jointing ensure that all joint voids are completely free from dirt and debris. Joint widths should be a minimum of 6mm wide and be at least 24mm deep for a perfect joint.

It is essential that the paving has been correctly installed and that the paving elements have been fully bedded on a class 1 mortar with no voids.

- Mix together equal proportions from both packs until uniform in colour.
- Tip the mixture onto the paved area to be pointed and brush the mixture into the gaps to be pointed. Brush off any excess product and wipe with a damp sponge to remove any remaining residue.
- For strongest results the joint should be compacted using a pointing tool.
- Leave to cure for 12 hours at 15-20°C. Note, curing times will be longer at lower temperatures and faster at higher temperatures.
- Do not apply if temperatures during the curing process are likely fall below 6°C.
- Not suitable for porcelain or granite.
- With chamfered paving, always leave at least 6mm joint at the bottom.

SHELF LIFE

Pavestone Pointfix can be stored for up to 24 months if unopened and 12 months once opened if kept in the sealed tub at room temperature.

HEALTH & SAFETY

Pavestone Pointfix is classified as non-hazardous. However, always wear protective gloves and eye protection.

Pavestone Pointfix Jointing Compound



H302: Harmful if swallowed.

H315: Causes skin irritation.

H317: May cause an allergic skin reaction.

H318: Causes serious eye damage.

H412: Toxic to aquatic life with long lasting effects.

For full information on all health & safety matters, please refer to the full health & safety data sheet, available from the Pavestone website.











Follow and like us on Facebook, Twitter and Pinterest to keep up to date

Pavestone UK Limited, Westington Quarry, Chipping Campden, Gloucestershire GL55 6EG.

> Tel 01386 848650 Fax 01386 849072

